

UNITED NATIONS  NATIONS UNIESPOSTAL ADDRESS—ADRESSE POSTALE: UNITED NATIONS, N. Y. 10017
CABLE ADDRESS—ADRESSE TELEGRAPHIQUE: UNATIONS NEWYORK

REFERENCE: C.N.274.1996.TREATIES-53 (Depositary Notification)

AGREEMENT CONCERNING THE ADOPTION OF UNIFORM TECHNICAL PRESCRIPTIONS FOR WHEELED VEHICLES, EQUIPMENT AND PARTS WHICH CAN BE FITTED AND/OR BE USED ON WHEELED VEHICLES AND THE CONDITIONS FOR RECIPROCAL RECOGNITION OF APPROVALS GRANTED ON THE BASIS OF THESE PRESCRIPTIONS
DONE AT GENEVA ON 20 MARCH 1958

AMENDMENTS PROPOSED TO REGULATION NO. 90

The Secretary-General of the United Nations, acting in his capacity as depositary, communicates the following:

On 22 August 1996, the Secretary-General received from the Administrative Committee of the above Agreement, pursuant to article 12 (1) of the Agreement, the following amendments to Regulation No. 90: ("Uniform provisions concerning the approval of replacement brake lining assemblies for power-driven vehicles and their trailers") annexed to the Agreement.

..... A copy, in the English and French languages, of the document containing the text of the proposed amendments is transmitted herewith (supplement 2 to the 01 series of amendments: doc. TRANS/WP.29/509).

The Secretary-General wishes to draw attention to article 12 (2) and (3) of the Agreement which reads as follows:

"2. An amendment to a Regulation will be considered to be adopted unless, within a period of six months from its notification by the Secretary-General, more than one-third of the Contracting Parties applying the Regulation at the time of notification have informed the Secretary-General of their disagreement with the amendment. If, after this period, the Secretary-General has not received declarations of disagreement of more than one-third of the Contracting Parties applying the Regulation, the Secretary-General shall as soon as possible declare the amendment as adopted and binding upon those Contracting Parties applying the Regulation who did not declare themselves opposed to it. When a Regulation is amended and at least one-fifth of the Contracting Parties applying the unamended Regulation subsequently declare that they wish to continue to apply the unamended Regulation, the unamended Regulation will be regarded as an alternative to the amended Regulation and will be incorporated formally as such into the Regulation with effect from the date of adoption of the amendment or its entry into force. In this case the obligations of the Contracting Parties applying the Regulation shall be the same as set out in paragraph 1.

3. Should a new Contracting Party accede to this Agreement between the time of the notification of the amendment to a Regulation by the Secretary-General and its entry into force, the Regulation in question shall not enter into force for that Contracting Party until two months after it has formally accepted the amendment or two months after the lapse of a period of six months since the communication to that Party by the Secretary-General of the proposed amendment."

5 September 1996

SS

Attention: Treaty Services of Ministries of Foreign Affairs and of international organizations concerned



**Economic and Social
Council**

Distr.

RESTRICTED

TRANS/WP.29/509

17 July 1996

ENGLISH

Original: ENGLISH
and FRENCH

ECONOMIC COMMISSION FOR EUROPE

INLAND TRANSPORT COMMITTEE

Working Party on the Construction of Vehicles

DRAFT SUPPLEMENT 2 TO THE 01 SERIES OF AMENDMENTS TO REGULATION No. 90
(Replacement brake linings)

Note: The text reproduced below was adopted by the Administrative Committee (AC.1) of the amended 1958 Agreement at its third session, following the recommendation by the Working Party at its one-hundred-and-ninth session. It is based on document TRANS/WP.29/R.735, as amended (TRANS/WP.29/504, paras. 58 and 89).

The distribution of documents of the Inland Transport Committee and its subsidiary bodies is limited. They are distributed only to governments, to specialized agencies and to governmental and non-governmental organizations which take part in the work of the Committee and of its subsidiary bodies, and should not be given to newspapers or periodicals.

The title of the Regulation, amend to read:

"UNIFORM PROVISIONS CONCERNING THE APPROVAL OF REPLACEMENT BRAKE LINING ASSEMBLIES AND DRUM BRAKE LININGS FOR POWER-DRIVEN VEHICLES AND THEIR TRAILERS"

Paragraph 1.2., amend to read:

"1.2. Replacement brake lining assemblies may be approved for fitment and use on power-driven vehicles and trailers having type approval in accordance with Regulation No. 13 or Regulation No. 78. Replacement drum brake linings designed to be riveted to a brake shoe may be approved for fitment and use on power-driven vehicles and trailers having type approval in accordance with Regulation No. 13 and classified in categories M₃, N₂, N₃, O₃ and O₄."

Paragraph 2.2., amend the word "develop" to read "are developed".

Paragraph 2.3.3., amend to read:

"2.3.3. "Brake lining" means the friction material component with the shape and final dimension to be fixed on to the shoe or backplate;"

Insert a new paragraph 2.3.4., to read:

"2.3.4. "Drum brake lining" means a brake lining for a drum brake."

Paragraph 2.3.4. (former), renumber as paragraph 2.3.5.

Paragraph 2.5., amend the words "a category" to read "wheel sets".

Insert a new paragraph 2.6., to read:

"2.6. "Drum brake lining type" means wheel sets of brake lining components which after fitment to the shoes do not differ in brake lining type, dimensions or functional characteristics."

Paragraph 2.6. (former), renumber as paragraph 2.7. and amend to read:

"2.7. ... Regulation No. 13, annex 2, paragraph 8.1 1/ or Regulation No. 78, annex 1, paragraph 5.4."

Paragraphs 2.7. and 2.8. (former), renumber as paragraphs 2.8. and 2.9.

Paragraph 2.9 (former), renumber as paragraph 2.12. and amend to read:

"2.12. "Manufacturer" means the organization which can assume technical responsibility for the brake lining assemblies or drum brake linings

1/ If such brake linings are not available on the market, alternatively, brake linings listed under paragraph 8.2. may be used.

and can demonstrate that it possesses the necessary means to achieve conformity of production."

Insert new paragraphs 2.10. and 2.11., to read:

- "2.10. "Original drum brake lining" means a drum brake lining conforming to the data attached to a vehicle type approval documentation."
- "2.11. "Replacement drum brake lining" means a drum brake lining of a type approved under this Regulation as a suitable service replacement when fitted to a shoe for an original drum brake lining."

Paragraphs 3.1. and 3.2., amend to read:

- "3.1. An application for approval of a replacement brake lining assembly type or a replacement drum brake lining type for (a) specific vehicle type(s) shall be submitted by the manufacturer of the replacement lining assembly/replacement drum brake lining or his duly accredited representative.
- 3.2. An application may be submitted by the holder of (a) vehicle type approval(s) to Regulation No. 13 or Regulation No. 78 in respect of replacement brake lining assemblies or replacement drum brake linings conforming to the type recorded in the vehicle type approval(s) documentation."

Paragraphs 3.3., 3.3.1. and 3.3.2., amend the words "replacement brake lining assembly" to read "replacement brake lining assembly or replacement drum brake lining."

Paragraph 3.4., amend the words "Brake lining assemblies" to read "Brake lining assemblies or drum brake linings."

Paragraph 3.5., amend the words "representative vehicle(s)" to read "representative vehicle(s) and/or brake(s)."

Paragraph 3.6.1., amend the words "annex 4, paragraph 5.1." to read "annex 8, paragraph 2.4.1. or 3.4.1., respectively".

Paragraph 4.1., amend to read:

- "4.1. If the brake lining assemblies or drum brake linings submitted for approval pursuant to this Regulation meet the requirements of paragraph 5 below, approval of the replacement brake lining assembly type or replacement drum brake lining type shall be granted."

Insert a new paragraph 4.1.1., to read:

- "4.1.1. In the case of replacement brake lining assemblies for vehicles of category L with a combined braking system in the meaning of paragraph 2.9. of Regulation No. 78 the approval must be restricted

to the brake lining assembly combination(s) on the axles of the vehicle having been tested according to annex 7 of this Regulation."

Paragraphs 4.2., 4.3. and 4.4., amend the words "brake lining assembly type" to read "brake lining assembly type or drum brake lining type."

Paragraph 4.2.1., replace the wording in brackets by: "(at present 02 for the Regulation in its 02 series of amendments)."

Paragraph 4.2.3., amend to read:

"4.2.3. A suffix of three digits shall indicate the shoe or backplate or specific dimension in the case of drum brake linings."

Paragraph 4.5., amend the words "brake lining assembly" to read "brake lining assembly or drum brake lining."

Paragraphs 5 to 5.6.2.1., amend to read:

"5. SPECIFICATIONS AND TESTS

5.1. General

A replacement brake lining assembly or a replacement drum brake lining shall be so designed and constructed that when substituted for the assembly or lining originally fitted to a vehicle the braking efficiency of that vehicle accords with that of the approved vehicle type.

Specifically:

- (a) a vehicle equipped with replacement brake lining assemblies or replacement drum brake linings shall satisfy the relevant braking prescriptions of Regulation No. 13 including the 09 series of amendments or Regulation No. 78 including the 01 series of amendments;
- (b) a replacement brake lining assembly or a replacement drum brake lining shall display performance characteristics similar to that of the original brake lining assembly or original drum brake lining it is intended to replace;
- (c) a replacement lining assembly or a replacement drum brake lining must possess adequate mechanical characteristics.

5.1.1. Replacement brake lining assemblies or replacement drum brake linings conforming to the type specified in vehicle type approval documentation to Regulation No. 13 or Regulation No. 78, are deemed to satisfy the requirements of paragraph 5 of this Regulation.

5.2. Performance requirements

- 5.2.1. Replacement brake lining assemblies for vehicles of categories M₁, M₂ and N₁.

Replacement brake lining assemblies shall be tested according to the prescriptions of annex 3 and must satisfy the requirements stated in this annex. For speed sensitivity and cold performance equivalence one of the two methods described in annex 3 shall be used.

- 5.2.2. Replacement brake lining assemblies and replacement drum brake linings for vehicles of categories M₃, N₂ and N₃.

Replacement brake lining assemblies and replacement drum brake linings shall be tested according to the prescriptions of annex 4, using one of the two methods described in section 1 (vehicle test) or in section 2 (inertia dynamometer test) and shall satisfy the requirements stated in this annex.

- 5.2.3. Replacement brake lining assemblies for vehicles of categories O₁ and O₂.

Replacement brake lining assemblies shall be tested according to the prescriptions of annex 5 and shall satisfy the requirements stated in this annex.

- 5.2.4. Replacement brake lining assemblies and replacement drum brake linings for vehicles of categories O₃ and O₄.

Replacement brake lining assemblies and replacement drum brake linings shall be tested according to the prescriptions of annex 6 and shall satisfy the requirements stated in this annex. For the tests one of the three methods described in section 3 of appendix 2 to annex 11 of Regulation No. 13 shall be used.

- 5.2.5. Replacement brake lining assemblies for vehicles of category L.

Replacement brake lining assemblies shall be tested according to the prescriptions of annex 7 and shall satisfy the requirements stated in this annex.

5.3. Mechanical characteristics

- 5.3.1. Replacement brake lining assemblies for vehicles of categories M₁, M₂, N₁, O₁, O₂, and L.

- 5.3.1.1. Replacement brake lining assemblies of the type for which approval is requested shall be tested for shear strength according to ISO 6312:(1981) Standard.

The minimum acceptable shear strength is 250 N/cm² for pad assemblies and 100 N/cm² for shoe assemblies.

- 5.3.1.2. Replacement brake lining assemblies of the type for which approval is requested shall be tested for compressibility according to ISO 6310:(1981) Standard.

The compressibility values shall not exceed 2 per cent at ambient temperature and 5 per cent at 400°C for pad assemblies and 2 per cent at ambient temperature and 4 per cent at 200°C for shoe assemblies.

- 5.3.2. Replacement brake lining assemblies and replacement drum brake linings for vehicles of categories M₃, N₂, N₃, O₃, and O₄.

- 5.3.2.1. Shear strength

This test applies only to disc brake pad assemblies.

Replacement brake lining assemblies of the type for which approval is requested shall be tested for shear strength according to ISO 6312:(1981) Standard. Brake lining assemblies may be divided into two or three parts to match the test machine's capability.

The minimum acceptable shear strength is 250 N/cm².

- 5.3.2.2. Compressibility

Replacement brake lining assemblies and replacement drum brake linings of the type for which approval is requested shall be tested for compressibility according to ISO 6310:1981 Standard. Flat specimens according to sample type I may be used.

The compressibility values shall not exceed 2 per cent at ambient temperature and 5 per cent at 400°C for pad assemblies and 2 per cent at ambient temperature and 4 per cent at 200°C for shoe assemblies and drum brake linings.

- 5.3.2.3. Material hardness */

This requirement applies to drum brake lining assemblies and drum brake linings.

Replacement brake lining assemblies or replacement drum brake linings of the type for which approval is requested shall be tested for hardness according to ISO 2039-2 (1987).

The hardness figure for the friction material at the rubbing surface shall be the mean value out of five sample linings from different production batches (if available) by taking five measurements at different places of each brake lining."

*/ This test is included for conformity of production purposes. Minimum values and the tolerances to be agreed with the Technical Service.

Paragraphs 6.1., 6.3.1. and 6.3.3., amend the words "replacement brake lining assemblies" to read "replacement brake lining assemblies or replacement drum brake linings."

Insert a new paragraph 6.2.1., to read:

"6.2.1. In the case of replacement drum brake linings rivets of suitable size and material shall be provided together with the brake linings."

Paragraph 6.4., amend to read:

"6.4. Each package shall contain fitting instructions in an official ECE language, supplemented by the corresponding text in the language of the country where it is sold:

6.4.1. with particular reference to auxiliary parts;

6.4.2. stating that replacement brake lining assemblies or replacement drum brake linings should be replaced in axle sets;

6.4.3. with, in the case of replacement drum brake linings, a general statement calling attention to the following points:

the integrity of the shoe platform, abutment and pivot;

freedom of the shoe from distortion, deformation and corrosion;

the type and size of rivet to be used;

the required riveting tools and forces.

6.4.4. with, additionally, in the case of combined braking systems in the meaning of paragraph 2.9. of Regulation No. 78 giving the approved brake lining assembly combination(s)."

Paragraph 6.5., amend the words "replacement brake lining assembly" to read "replacement brake lining assembly or replacement drum brake lining" and the words "shall display" to read "shall display permanently".

Paragraph 7., add at the end the words "OR THE REPLACEMENT DRUM BRAKE LINING".

Paragraph 7.1., amend the words "replacement brake lining assembly type" to read "replacement brake lining assembly type or replacement drum brake lining type."

Paragraph 7.1.1., amend the words "brake lining assembly" to read "brake lining assembly or drum brake lining".

Paragraph 8.1., amend the words "Replacement brake lining assemblies" to read "Replacement brake lining assemblies or replacement drum brake linings."

Paragraph 8.2., amend the words "Original brake lining assemblies" to read "Original brake lining assemblies or original drum brake linings."

Paragraph 8.4.1., amend to read:

"8.4.1. ensure that for each replacement brake lining assembly type or replacement drum brake lining type at least the relevant tests prescribed in paragraph 5.3. and a friction behaviour test as prescribed in annex 8 of this Regulation are carried out on a statistically controlled and random basis in accordance with a regular quality assurance procedure;"

Annex 1,

The heading, amend to read:

"....
of a replacement brake lining assembly or replacement drum brake lining pursuant to Regulation No. 90
...."

Item 3, amend to read:

"3. Make and type of brake lining assembly/drum brake lining 2/
....."


Items 5 and 6, amend to read:

- "5. Vehicles/axles/brakes for which the brake lining assembly type/drum brake lining type qualifies as original brake lining assembly/original drum brake lining:
- 6. Vehicles/axles/brakes for which the brake lining assembly type/drum brake lining type qualifies as replacement brake lining assembly/replacement drum brake lining:
- 6.1. additionally in the case of combined braking systems in the meaning of paragraph 2.9. of Regulation No. 78, approved brake lining assembly combination(s):

Annex 2,

Insert a new "Example of drum brake lining marking" after "Example of shoe assembly marking" as follows:

"Drum brake lining marking"

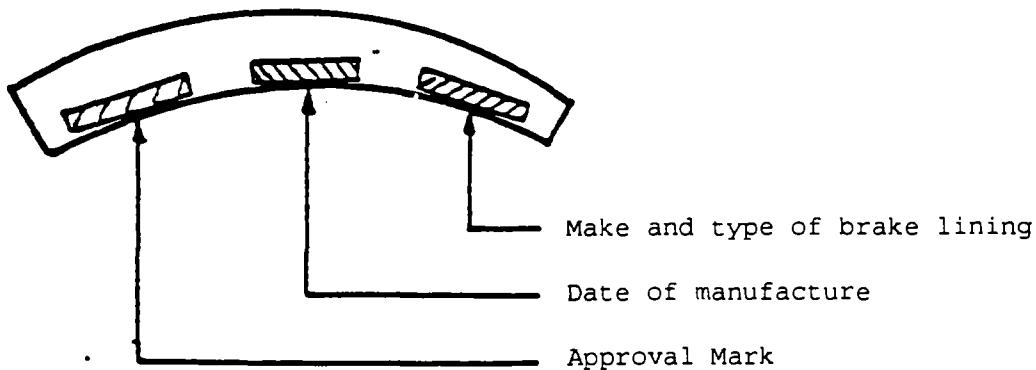

Annex 3 (former), replace by the following text:

"Annex 3

REQUIREMENTS FOR REPLACEMENT BRAKE LINING ASSEMBLIES FOR VEHICLES
OF CATEGORIES M_1 , M_2 AND N_1

1. Conformance with Regulation No. 13

Compliance with the requirements of Regulation No. 13 shall be demonstrated in a vehicle test.

1.1. Test Vehicle

A vehicle which is representative of the type(s) for which the replacement brake lining assembly approval is required shall be equipped with the replacement brake lining assemblies of the type for which approval is requested and instrumented for brake testing as required by Regulation No. 13.

Brake linings submitted for test shall be fitted to the relevant brakes and, until a fixed burnishing procedure is established, shall be burnished to the manufacturer's instructions in agreement with the technical service.

1.2. The braking system of the vehicle shall be tested according to the requirements for the vehicle category in question (M_1 , M_2 or N_1) in Regulation No. 13, annex 4, paragraphs 1 and 2. The applicable requirements or tests are:

1.2.1. Service braking system

- 1.2.1.1. Type-O test with engine disconnected, vehicle laden
- 1.2.1.2. Type-O test with engine connected, vehicle unladen and laden, according to Regulation No. 13, annex 4, paragraphs 1.4.3.1. (stability test) and 1.4.3.2. (only the test with initial speed $v = 0.8 v_{\max}$)
- 1.2.1.3. Type-I test
- 1.2.2. Secondary braking system
 - 1.2.2.1. Type-O test with engine disconnected, vehicle laden (this test may be omitted in cases where it is obvious that the requirements are met, e.g. diagonal split braking system)
- 1.2.3. Parking braking system
(Only applicable if the brakes for which lining approval is sought are used for parking).
 - 1.2.3.1. Downhill test at 18 per cent gradient, vehicle laden.
- 1.3. The vehicle must satisfy all the relevant requirements stated in Regulation No. 13, annex 4, paragraph 2 for that category of vehicles.

2. Additional requirements

Compliance with the additional requirements shall be demonstrated by using one of the two following methods:

2.1. Vehicle test (split axle test)

For this test the vehicle shall be fully laden and all brake applications made with engine disconnected, on a level road.

The vehicle service brake control system shall be equipped with a means of isolating front and rear axle brakes so that either may be used independently of the other.

Where brake lining assembly approval is required for front axle brakes the rear axle brakes shall remain inoperative throughout the test.

Where brake lining assembly approval is required for rear axle brakes the front axle brakes shall remain inoperative throughout the test.

2.1.1. Cold performance equivalence test

A comparison of the cold performance of the replacement brake lining assembly and the original brake lining assembly shall be made by comparing the results of testing to the following method.

- 2.1.1.1. Make a minimum of six brake applications at spaced increments of pedal effort or line pressure up to wheel lock or, alternatively, up to a mean fully developed deceleration of 6 m/s^2 or up to the allowed maximum pedal force for the category of vehicle in question from an initial speed as given in the table below:

| Vehicle category | Test speed in km/h | |
|------------------|--------------------|-----------|
| | front axle | rear axle |
| M ₁ | 70 | 45 |
| M ₂ | 50 | 40 |
| N ₁ | 65 | 50 |

The initial brake temperature at the start of each application shall be $\leq 100^\circ\text{C}$.

- 2.1.1.2. Note and plot pedal force or line pressure and mean fully developed deceleration for each application, and determine the pedal force or line pressure required to achieve (if possible) a mean fully developed deceleration of 5 m/s^2 for front axle brakes and 3 m/s^2 for rear axle brakes. If these values cannot be achieved with the maximum allowed pedal force determine alternatively the pedal force or line pressure required to achieve maximum deceleration.
- 2.1.1.3. The replacement brake lining assembly shall be considered to show similar performance characteristics to the original brake lining assembly if the achieved mean fully developed decelerations at the same control force or line pressure in the upper two thirds of the generated curve are within 15 per cent of those obtained with the original brake lining assembly.
- 2.1.2. Speed sensitivity test
- 2.1.2.1. Using the pedal force derived from paragraph 2.1.1.2. of this annex and with initial brake temperature $\leq 100^\circ\text{C}$, make three brake applications from each of the following speeds:
- Front axle 65, 100 km/h and 135 km/h where v_{max} exceeds 150 km/h.
- Rear axle 45, 65 km/h and 90 km/h where v_{max} exceeds 150 km/h.
- 2.1.2.2. Average the results for each group of three applications and plot speed against corresponding mean fully developed deceleration.
- 2.1.2.3. Mean fully developed decelerations recorded for the higher speeds shall lie within 15 per cent of that recorded for the lowest speed.
- 2.2. Inertia dynamometer test

2.2.1. Test equipment

For the tests an inertia dynamometer shall be equipped with the vehicle brake in question. The dynamometer shall be instrumented for continuous recording of rotational speed, brake torque, pressure in the brake line, number of rotations after brake application, braking time and brake rotor temperature.

2.2.2. Test conditions

2.2.2.1. The rotational mass of the dynamometer shall correspond to half the axle portion of the maximum vehicle mass as listed in the table below and to the rolling radius of the largest tyre that is authorized for that vehicle type(s).

| Vehicle category | Axle portion of maximum vehicle mass | |
|------------------|--------------------------------------|------|
| | front | rear |
| M ₁ | 0.77 | 0.32 |
| M ₂ | 0.69 | 0.44 |
| N ₁ | 0.66 | 0.39 |

2.2.2.2. The initial dynamometer rotational speed shall correspond to the linear vehicle speed as stated in paragraphs 2.2.3. and 2.2.4. of this annex and shall be based on the dynamic rolling radius of the tyre.

2.2.2.3. Brake linings submitted for test shall be fitted to the relevant brakes and, until a fixed burnishing procedure is established, shall be burnished to the manufacturer's instructions in agreement with the technical service.

2.2.2.4. If cooling air is used, the speed of the airflow at the brake must not be higher than 10 km/h.

2.2.3. Cold performance equivalence test

A comparison of the cold performance of the replacement brake lining assembly and the original brake lining assembly shall be made by comparing the results of testing to the following method.

2.2.3.1. From the initial speed of 80 km/h for M₁ and N₁ and 60 km/h for M₂ and with brake temperature $\leq 100^{\circ}\text{C}$ at the start of each application make a minimum of six brake applications at spaced intervals of line pressure up to a mean fully developed deceleration of 6 m/s^2 .

2.2.3.2. Note and plot line pressure and mean fully developed deceleration for each application, and determine line pressure required to achieve 5 m/s^2 .

- 2.2.3.3. The replacement brake lining assembly shall be considered to show similar performance characteristics to the original brake lining assembly if the achieved mean fully developed decelerations at the same control force or line pressure in the upper two thirds of the generated curve are within 15 per cent of those obtained with the original brake lining assembly.
- 2.2.4. Speed sensitivity test
 - 2.2.4.1. Using the line pressure derived from paragraph 2.2.3.2. and with initial brake temperature $\leq 100^{\circ}\text{C}$ make three brake applications from rotational speeds corresponding to vehicle linear speeds of:

75, 120 km/h and 160 km/h where v_{max} exceeds 150 km/h
 - 2.2.4.2. Average the results for each group of three applications and plot speed against corresponding mean fully developed deceleration.
 - 2.2.4.3. Mean fully developed decelerations recorded for the higher speeds shall lie within 15 per cent of that recorded for the lowest speed."

Insert new annexes 4 to 7, to read:

"Annex 4

REQUIREMENTS FOR REPLACEMENT BRAKE LINING ASSEMBLIES AND DRUM BRAKE LININGS
FOR VEHICLES OF CATEGORIES M_3 , N_2 AND N_3

1. Vehicle test
 - 1.1. Test vehicle

A vehicle which is representative of the type(s) for which the replacement brake lining assembly approval or drum brake lining approval is required shall be equipped with brake lining assemblies or drum brake linings of the type for which approval is sought and instrumented for brake testing as required by Regulation No. 13.

Brake linings submitted for test shall be fitted to the relevant brakes and, until a fixed burnishing procedure is established, shall be burnished to the manufacturer's instructions in agreement with the technical service.
 - 1.2. Tests and requirements
 - 1.2.1. Conformance with Regulation No. 13
 - 1.2.1.1. The braking system of the vehicle shall be tested according to the requirements for the vehicle category in question (M_3 , N_2 or N_3) in Regulation No. 13, annex 4, paragraphs 1 and 2. The applicable requirements or tests are:

- 1.2.1.1.1. Service braking system
- 1.2.1.1.1.1. Type-0 test with engine disconnected, vehicle laden
- 1.2.1.1.1.2. Type-0 test with engine connected, vehicle unladen and laden, according to Regulation No. 13, annex 4, paragraphs 1.4.3.1. (stability test) and 1.4.3.2. (only the test with initial speed $v = 0.8 v_{\max}$).
- 1.2.1.1.1.3. Type-I test according to Regulation No. 13, annex 4, paragraphs 1.5.1. and 1.5.3.
- 1.2.1.1.1.4. Type-II test

The laden vehicle must be tested in such a manner that the energy input is equivalent to that recorded in the same period of time with the laden vehicle driven at an average speed of 30 km/h on a 2.5 per cent down-gradient for a distance of 6 km with the gear disengaged, the braking energy being taken by the service brakes alone.
- 1.2.1.1.2. Secondary braking system
- 1.2.1.1.2.1. Type-0 test with engine disconnected, vehicle laden (this test may be omitted if covered by tests according to paragraph 1.2.2. of this annex).
- 1.2.1.1.3. Parking braking system
(Only applicable if the brakes for which lining approval is sought are used for parking).
- 1.2.1.1.3.1. Downhill test at 18 per cent gradient, vehicle laden
- 1.2.1.2. The vehicle must satisfy all relevant requirements stated in Regulation No. 13, annex 4, paragraph 2 for that category of vehicle.
- 1.2.2. Additional requirements (split axle test)

For the tests mentioned below the vehicle shall be fully laden and all brake applications made with engine disconnected, on a level road.

The vehicle service brake control system shall be equipped with a means of isolating front and rear axle brakes so that either may be used independently of the other.

Where brake lining assembly approval or drum brake lining approval is required for front axle brakes the rear axle brakes shall remain inoperative throughout the test.

Where brake lining assembly approval or drum brake lining approval is required for rear axle brakes the front axle brakes shall remain inoperative throughout the test.

1.2.2.1. Cold performance equivalence test

A comparison of the cold performance of the replacement brake lining assembly or the replacement drum brake lining and the original brake lining assembly or the original drum brake lining shall be made by comparing the results of testing to the following method.

1.2.2.1.1. Make a minimum of six brake applications at spaced increments of pedal force or line pressure up to wheel lock or, alternatively, up to a mean fully developed deceleration of 3.5 m/s^2 or up to the maximum allowed pedal force or up to the maximum line pressure from an initial speed of 45 km/h and with a brake temperature $\leq 100^\circ\text{C}$ at the start of each application.

1.2.2.1.2. Note and plot pedal force or line pressure and mean fully developed deceleration for each application, and determine the pedal force or line pressure required to achieve (if possible) a mean fully developed deceleration of 3 m/s^2 . If this value cannot be achieved determine alternatively the pedal force or line pressure required to achieve maximum deceleration.

1.2.2.1.3. The replacement brake lining assembly or the replacement drum brake lining shall be considered to show similar performance characteristics to the original brake lining assembly or the original drum brake lining if the achieved mean fully developed decelerations at the same control force or line pressure in the upper two thirds of the generated curve are within 15 per cent of those obtained with the original brake lining assembly or the original drum brake lining.

1.2.2.2. Speed sensitivity test

1.2.2.2.1. Using the pedal force derived from paragraph 1.2.2.1.2. of this annex and with initial brake temperature $\leq 100^\circ\text{C}$, make three brake applications from each of the following speeds:

40 km/h down to 20 km/h,
60 km/h down to 40 km/h and
80 km/h down to 60 km/h (if $v_{\text{max}} \geq 90 \text{ km/h}$)

1.2.2.2.2. Average the results for each group of three applications and plot speed against corresponding mean fully developed deceleration.

1.2.2.2.3. Mean fully developed decelerations recorded for the higher speeds shall lie within 25 per cent of that recorded for the lowest speed.

2. Inertia dynamometer test

2.1. Test equipment

For the tests an inertia dynamometer shall be equipped with the vehicle brake in question. The dynamometer shall be instrumented for continuous recording of rotational speed, brake torque, pressure in the brake line, number of rotations after brake application, braking time and brake rotor temperature.

2.1.1. Test conditions

2.1.1.1. The rotational mass of the dynamometer shall correspond to half the axle portion of 0.55 of the maximum vehicle mass and the rolling radius of the largest tyre that is authorised for that vehicle type(s).

2.1.1.2. The initial dynamometer rotational speed shall correspond to the linear vehicle speed as stated in the paragraphs below and shall be based on the dynamic rolling radius of the smallest tyre that is authorized for that vehicle type(s).

2.1.1.3. Brake lining assemblies or drum brake linings submitted for the test shall be fitted to the brake and, until a fixed burnishing procedure is established, shall be burnished to the manufacturer's instructions in agreement with the technical service.

2.1.1.4. If cooling air is used, the speed of the airflow at the brake must not be higher than 10 km/h.

2.1.1.5. The actuation cylinder fitted to the brake must be of the smallest size that is authorized for that vehicle type(s).

2.2. Tests and requirements

2.2.1. Tests derived from ECE Regulation No. 13

2.2.1.1. Type-0 test

From the initial speed of 60 km/h with a brake temperature $\leq 100^{\circ}\text{C}$ at the start of each application make a minimum of six brake applications at spaced intervals of line pressure up to the line pressure that is permanently guaranteed by the braking system of the vehicle type(s) (e.g. cut in pressure of the compressor). A mean fully developed deceleration of at least 5 m/s^2 must be achieved.

2.2.1.2 Type-0 test, high speed performance

Make three brake applications with a brake temperature of $\leq 100^{\circ}\text{C}$ at the start of each application from a speed of 100 km/h where approval is directed to vehicles of category N_2 and 90 km/h where approval is directed to vehicles of categories M_3 and N_3 using the guaranteed line pressure as defined in paragraph 2.2.1.1. The mean value of the achieved mean fully developed decelerations of the three applications must be at least 4 m/s^2 .

2.2.1.3 Type-I test

2.2.1.3.1. Heating procedure

Make 20 consecutive snub applications with $v_1 = 60 \text{ km/h}$ and $v_2 = 30 \text{ km/h}$ with a cycle time of 60 s starting at a brake temperature of $\leq 100^{\circ}\text{C}$ at the first application. The line pressure shall correspond to a deceleration of 3 m/s^2 at the first application and must remain constant throughout the succeeding applications.

2.2.1.3.2. Hot performance

On completion of the heating procedure the hot performance shall be measured under the conditions of paragraph 2.2.1.1. above using the guaranteed line pressure as defined in paragraph 2.2.1.1. (the temperature conditions may be different). The mean fully developed deceleration with the heated brake must not be less than 60 per cent of the value achieved with the cold brake or 4 m/s^2 .

2.2.1.3.3. Recovery

Starting 120 s after the hot performance brake application make 5 full stops with the line pressure used in paragraph 2.2.1.3.1. above and with intervals of at least 2 minutes from the initial speed of 60 km/h. At the beginning of the fifth application the brake temperature shall be $\leq 100^{\circ}\text{C}$ and the mean fully developed deceleration achieved shall be within 10 per cent of that calculated from the relation line pressure/deceleration of the Type-0 test at 60 km/h.

2.2.1.4 Type-II test

2.2.1.4.1. Heating procedure

The brakes shall be heated by constant braking torque corresponding to a deceleration of 0.15 m/s^2 at a constant speed of 30 km/h during a period of 12 minutes.

2.2.1.4.2. Hot performance

On completion of the heating procedure the hot performance shall be measured under the conditions of paragraph 2.2.1.1. above using the guaranteed line pressure as defined in paragraph 2.2.1.1. (the temperature conditions may be different). The mean fully developed deceleration with the heated brake must not be less than 3.75 m/s^2 .

2.2.1.5. Static test for parking performance

2.2.1.5.1. For the whole range of applications determine the worst case regarding input force to the brake, maximum vehicle mass to be braked by one axle, and tyre radius.

2.2.1.5.2. Apply the brake with the input force as determined under paragraph 2.2.1.5.1. above.

2.2.1.5.3. Put a slowly increasing torque on the dyno shaft in order to turn the drum or disc. Measure the output torque at the brake in the moment the dyno shaft begins to move and calculate corresponding axle braking force using the tyre radius as determined under paragraph 2.2.1.5.1.

2.2.1.5.4. The brake force measured under paragraph 2.2.1.5.3. divided by the vehicle mass as determined under paragraph 2.2.1.5.1. must give at least a quotient of 0.18.

2.2.2. Cold performance equivalence test

A comparison of the cold performance of the replacement brake lining assembly or the replacement drum brake lining and the original brake lining assembly or the original drum brake lining shall be made by comparing the results of the Type-0 test as described in paragraph 2.2.1.1.

2.2.2.1. The Type-0 test as prescribed in paragraph 2.2.1.1. shall be performed with one set of the original brake lining assembly or the original drum brake lining.

2.2.2.2. The replacement brake lining assembly or the replacement drum brake lining shall be considered to show similar performance characteristics to the original brake lining assembly or the original drum brake lining if the achieved mean fully developed decelerations at the same line pressure in the upper two thirds of the generated curve are within 15 per cent of those obtained with the original brake lining assembly or the original drum brake lining.

2.2.3. Speed sensitivity test

- 2.2.3.1. Using the guaranteed line pressure as defined in paragraph 2.2.1.1. and with initial brake temperature $\leq 100^{\circ}\text{C}$, make three brake applications from each of the following speeds:
- 60 km/h down to 30 km/h,
80 km/h down to 60 km/h, and
110 km/h down to 80 km/h (if $v_{\text{max}} \geq 90$ km/h).
- 2.2.3.2. Average the results for each group of three applications and plot speed against corresponding mean fully developed deceleration.
- 2.2.2.3. Mean fully developed decelerations recorded for the higher speeds shall lie within 25 per cent of that recorded for the lowest speed.

Annex 5

REQUIREMENTS FOR REPLACEMENT BRAKE LINING ASSEMBLIES FOR VEHICLES OF CATEGORIES O_1 AND O_2

1. General

The test method described in this annex is based on an inertia dynamometer test. Alternatively the tests may be carried out on a test vehicle or on a rolling road test bench provided that the same test conditions are achieved and the same parameters measured as in the inertia dynamometer test.

2. Test equipment

For the tests an inertia dynamometer shall be equipped with the vehicle brake in question. The dynamometer shall be instrumented for continuous recording of rotational speed, brake torque, pressure in the brake line or actuation force, number of rotations after brake application, braking time and brake rotor temperature.

2.1. Test conditions

- 2.1.1. The rotational mass of the dynamometer shall correspond to half the relevant axle portion of the maximum vehicle mass and the rolling radius of the largest tyre that is authorized for that vehicle type(s).
- 2.1.2. The initial dynamometer rotational speed shall correspond to the linear vehicle speed as stated in paragraph 3.1. of this annex and shall be based on the dynamic rolling radius of the smallest tyre that is authorized for that vehicle type(s).

- 2.1.3. Brake linings submitted for the test shall be fitted to the relevant brake and, until a fixed burnishing procedure is established, shall be burnished to the manufacturer's instructions in agreement with the technical service.
- 2.1.4. If cooling air is used the speed of the airflow at the brake must not be higher than 10 km/h.
- 2.1.5. The actuation device fitted to the brake must correspond to the vehicle installation.

3. Tests and requirements

3.1. Type-0 test

From the initial speed of 60 km/h with a brake temperature $\leq 100^{\circ}\text{C}$ at the start of each application make a minimum of six consecutive brake applications at spaced intervals of line pressure or application force up to the maximum line pressure or up to 6 m/s^2 deceleration. Repeat the last brake application using an initial speed of 40 km/h.

3.2. Type-I test

3.2.1. Heating procedure

The brake shall be heated with continuous braking according to the requirement of Regulation No. 13, annex 4, paragraph 1.5.2. starting with a brake rotor temperature $\leq 100^{\circ}\text{C}$.

3.2.2. Hot performance

On completion of the heating procedure the hot performance from an initial speed of 40 km/h shall be measured under the conditions of paragraph 3.2.1. above using the same line pressure or application force (the temperature conditions may be different). The mean fully developed deceleration with the heated brake must not be less than 60 per cent of the value achieved with the cold brake or 3.5 m/s^2 .

3.3. Cold performance equivalence test

A comparison of the cold performance of the replacement brake lining assembly and the original brake lining assembly shall be made by comparing the results of the Type-0 test as described in paragraph 3.1.

3.3.1. The Type-0 test as prescribed in paragraph 3.1. shall be performed with one set of the original brake lining assembly.

3.3.2. The replacement brake lining assembly shall be considered to show similar performance characteristics to the original brake lining assembly if the achieved mean fully developed decelerations at the same line pressure or application force in the upper two thirds of

the generated curve are within 15 per cent of those obtained with the original brake lining assembly.

Annex 6

REQUIREMENTS FOR REPLACEMENT BRAKE LINING ASSEMBLIES AND DRUM BRAKE LININGS FOR VEHICLES OF CATEGORIES O₃ AND O₄

1. Test conditions

The tests prescribed in this annex may be carried out alternatively on a test vehicle or on an inertia dynamometer or on a rolling road test bench under the same conditions as mentioned in Regulation 13, annex 11, appendix 2, paragraphs 3.1. to 3.4.

Brake linings submitted for test shall be fitted to the relevant brakes and, until a fixed burnishing procedure is established, shall be burnished to the manufacturer's instructions in agreement with the technical service.

2. Tests and requirements

2.1. Conformance with Regulation No. 13, annex 11

The brakes shall be tested according to the requirements of Regulation No. 13, annex 11, appendix 2, paragraph 3.5.

2.1.1. The results shall be reported in a form according to Regulation No. 13, annex 11, appendix 3.

2.1.2. A comparison shall be made between these results and those obtained with the original brake lining assemblies or the original drum brake linings under the same conditions.

2.1.3. The achieved hot performance at the same input torque of the replacement brake lining assembly or the replacement drum brake lining in the Type-I test and (if applicable) in the Type-II or Type-III test (where applicable) must be ≥ 90 per cent of the hot performance of the original brake lining assembly or the original drum brake lining. The corresponding stroke of the actuator must not be ≥ 110 per cent of the value achieved with the original brake lining assembly or the original drum brake lining and must not exceed the value s_p as defined in annex 11, appendix 2, paragraph 2 of Regulation No. 13.

2.2. Cold performance equivalence test (Type-0)

2.2.1. Under the conditions of paragraph 1 of this annex and from an initial speed of 60 km/h with a brake temperature $\leq 100^\circ\text{C}$ make 6 brake

- applications at spaced intervals of control force or line pressure up to 6.5 bar or an achieved deceleration of 6 m/s^2 .
- 2.2.2. Note and plot control force or line pressure and mean brake torque or mean fully developed deceleration for each application.
 - 2.2.3. Compare the results with those obtained with the original brake lining assemblies or the original drum brake linings under the same test conditions.
 - 2.2.4. The replacement brake lining assembly or the replacement drum brake lining shall be considered to show similar performance characteristics to the original brake lining assembly or the original drum brake lining if the achieved mean fully developed decelerations at the same input force or line pressure in the upper two thirds of the generated curve are within -5 per cent and +15 per cent of those obtained with the original brake lining assembly or the original drum brake lining.

Annex 7

REQUIREMENTS FOR REPLACEMENT BRAKE LINING ASSEMBLIES FOR VEHICLES OF CATEGORY L

1. Test conditions

- 1.1. A vehicle which is representative of the type(s) for which the replacement brake lining assembly approval is required shall be equipped with the brake lining assemblies of the type for which approval is requested and instrumented for brake testing as required by Regulation No. 78.
- 1.2. Brake lining assemblies submitted for the test shall be fitted to the relevant brakes and, until a fixed burnishing procedure is established, shall be burnished to the manufacturer's instructions in agreement with the technical service.
- 1.3. In the case of brake lining assemblies for vehicles with a combined braking system in the meaning of paragraph 2.9. of Regulation No. 78 the combination(s) of brake lining assemblies for the front and the rear axle to which the approval shall be directed must be tested.

The combination may consist of replacement brake lining assemblies for both axles and/or a replacement brake lining assembly on one and an original brake lining assembly on the other axle.

2. Tests and requirements

- 2.1. Conformance with Regulation No. 78

- 2.1.1. The braking system of the vehicle shall be tested according to the requirements for the vehicle category in question (L_1 , L_2 , L_3 , L_4 or L_5) in Regulation No. 78, annex 3, paragraph 1. The applicable requirements or tests are:
- 2.1.1.1. Type-0 test with engine disconnected
- The test is to be carried out only in the laden condition. Make a minimum of six brake applications at spaced increments of control force or line pressure up to wheel lock, or up to a deceleration of 5 m/s^2 or up to the maximum allowed control force.
- 2.1.1.2. Type-0 test with engine connected
- Only applicable for vehicles of categories L_3 , L_4 and L_5 .
- 2.1.1.3. Type-0 test with wet brakes
- Not applicable to vehicles of category L_5 or in cases of drum brakes or fully enclosed disc brakes not subjected to this test during approval to Regulation No. 78.
- 2.1.1.4. Type-I test
- Only applicable for vehicles of categories L_3 , L_4 and L_5 .
- 2.1.2. The vehicle must satisfy all the relevant requirements stated in Regulation No. 78, annex 3, paragraph 2 for that category of vehicles.
- 2.2. Additional requirements
- 2.2.1. Cold performance equivalence test
- A comparison of the cold performance of the replacement brake lining assembly and the original brake lining assembly shall be made by comparing the results of the Type-0 test as described in paragraph 2.1.1.1.
- 2.2.1.1. The Type-0 test as prescribed in paragraph 2.1.1.1. shall be performed with one set of the original brake lining assembly.
- 2.2.1.2. The replacement brake lining assembly shall be considered to show similar performance characteristics to the original brake lining assembly if the achieved mean fully developed decelerations at the same line pressure in the upper two thirds of the generated curve are within 15 per cent of those obtained with the original brake lining assembly.

2.2.2. Speed sensitivity test

This test is only applicable for vehicles of categories L₃, L₄ and L₅ and shall be carried out with the laden vehicle under the conditions of the Type-O test with engine disconnected. However, the test speeds are different.

2.2.2.1. From the results of the Type-O test as described in paragraph 2.1.1.1. determine the control force or line pressure corresponding to the minimum required mean fully developed deceleration for that category of vehicle.

2.2.2.2. Using the control force or line pressure determined in paragraph 2.2.2.1. and with initial brake temperature $\leq 100^{\circ}\text{C}$, make three brake applications from each of the following speeds:

40 km/h, 80 km/h and 120 km/h (if $v_{\text{max}} \geq 130$ km/h)

2.2.2.3. Average the results for each group of three applications and plot speed against corresponding mean fully developed deceleration.

2.2.2.4. Mean fully developed decelerations recorded for the higher speeds shall lie within 15 per cent of that recorded for the lowest speed."

Annex 4 (former), renumber as "annex 8" and amend to read:

"Annex 8

DETERMINATION OF FRICTION BEHAVIOUR BY MACHINE TESTING

Insert a new paragraph 2, to read:

"2. Replacement brake lining assemblies for vehicles of categories M₁, M₂, N₁, O₁, O₂, and L"

Paragraphs 2 to 5.2.2., replace by the following text:

"2.1. Equipment

2.1.1. The machine shall be designed to accept and operate a full size brake similar to those fitted to the vehicle axle used for approval testing to paragraph 5 of this Regulation.

2.1.2. The disc or drum rotational speed shall be 660 ± 10 1/min 2/ without load and shall not fall below 600 1/min on full load.

2/ In the case of vehicles of categories L₁ and L₂, a lower test speed may be used.

- 2.1.3. The test cycles and brake applications during the cycles to be adjustable and automatic.
- 2.1.4. Output torque or brake pressure (constant torque method) and working surface temperature shall be recorded.
- 2.1.5. Provisions shall be made to direct cooling air across the brake at a rate of $600 \pm 60 \text{ m}^3/\text{h}$.

2.2. Test procedure

2.2.1. Sample preparation

The manufacturer's bedding schedule shall ensure a minimum of 80 per cent surface contact area for pad assemblies without exceeding a surface temperature of 300°C and 70 per cent surface contact area for the leading shoe assemblies without exceeding a surface temperature of 200°C .

2.2.2. Test schedule

The test schedule comprises a number of consecutive braking cycles each containing X braking intervals of 5 seconds brake applied followed by 10 seconds brake released.

The following two methods may be used alternatively:

2.2.2.1. Test schedule with constant pressure

2.2.2.1.1. Pad assemblies

The hydraulic pressure p under the piston(s) of the calliper shall be constant following the formula:

$$p = \frac{M_d}{0.57 \cdot r_w \cdot A_k}$$

- $M_d = 150 \text{ Nm}$ for $A_k \leq 18.1 \text{ cm}^2$
- $M_d = 300 \text{ Nm}$ for $A_k > 18.1 \text{ cm}^2$
- A_k = area of calliper piston(s)
- r_w = effective radius of disc

| No of cycle | Number of brake applications X | Initial brake rotor temperature (°C) | Max. brake rotor temperature (°C) | Forced cooling |
|-------------|--------------------------------|--------------------------------------|-----------------------------------|----------------|
| 1 | 1 x 10 | ≤ 60 | open | no |
| 2-6 | 5 x 10 | 100 | open (350) <u>3/</u> | no |
| 7 | 1 x 10 | 100 | open | yes |

2.2.2.1.2. Shoe assemblies

The mean contact pressure at the brake lining working surface shall be constant at $22 \pm 6 \text{ N/cm}^2$ calculated for a static brake without self-energizing.

| No of cycle | Number of brake applications X | Initial brake rotor temperature (°C) | Max. brake rotor temperature (°C) | Forced cooling |
|-------------|--------------------------------|--------------------------------------|-----------------------------------|----------------|
| 1 | 1 x 10 | ≤ 60 | 200 | yes |
| 2 | 1 x 10 | 100 | open | no |
| 3 | 1 x 10 | 100 | 200 | yes |
| 4 | 1 x 10 | 100 | open | nc |

2.2.2.2. Test schedule with constant torque

This method applies only for pad assemblies. The brake torque shall be constant within a tolerance of ± 5 per cent and adjusted to guarantee the maximum brake rotor temperatures given in the table below.

3/ In the case of vehicles of category L, the temperature shall be limited to 350°C. If necessary, the number of applications per cycle must be reduced accordingly. However, in this case, the number of cycles shall be increased to keep the total number of applications constant.

| No of cycle | Number of brake applications X | Initial brake rotor temperature (°C) | Max. brake rotor temperature (°C) | Forced cooling |
|-------------|--------------------------------|--------------------------------------|-----------------------------------|----------------|
| 1 | 1 x 5 | ≤ 60 | 300-350 (200-250) <u>4/</u> | no |
| 2-4 | 3 x 5 | 100 | 300-350 (200-250) | no |
| 5 | 1 x 10 | 100 | 500-600 (300-350) | no |
| 6-9 | 4 x 5 | 100 | 300-350 (200-250) | no |
| 10 | 1 x 10 | 100 | 500-600 (300-350) | no |
| 11-13 | 3 x 5 | 100 | 300-350 (200-250) | no |
| 14 | 1 x 5 | ≤ 60 | 300-350 (200-250) | no |

2.3. Evaluation of test results

Friction behaviour is determined from the brake torque noted at selected points in a test schedule. Where brake factor is constant, e.g. a disc brake, brake torque may be translated to coefficient of friction.

2.3.1. Pad assemblies

2.3.1.1. The operational coefficient of friction (μ_{op}) is the mean of the values recorded during cycles two to seven (constant pressure method) or during cycles 2-4, 6-9 and 11-13 (constant torque method); measurement being made one second after commencing the first brake application of each cycle.

2.3.1.2. The maximum coefficient of friction (μ_{max}) is the highest value recorded during all cycles.

2.3.1.3. The minimum coefficient of friction (μ_{min}) is the lowest value recorded during all cycles.

2.3.2. Shoe assemblies

2.3.2.1. The mean torque (M_{mean}) is the average of the maximum and minimum values of brake torque recorded during the fifth brake application of cycles one and three.

2.3.2.2. The hot torque (M_{hot}) is the minimum brake torque developed during cycles two and four. If the temperature exceeds 300°C during these cycles the value at 300°C is to be taken as M_{hot} .

2.4. Acceptance criteria

2.4.1. With each application for approval of a brake lining assembly type there shall be submitted:

4/ Values in brackets for vehicles of category L.

- 2.4.1.1. for pad assemblies, values for μ_{op} , μ_{min} , μ_{max} .
- 2.4.1.2. for shoe assemblies, values for M_{mean} and M_{hot} .
- 2.4.2. During production of an approved brake lining assembly type, test samples must demonstrate compliance with the values registered under paragraph 2.4.1. of this annex with the following tolerances:
 - 2.4.2.1. for disc brake pads:
 - $\mu_{op} \pm 15$ per cent of registered value
 - $\mu_{min} \geq$ registered value
 - $\mu_{max} \leq$ registered value
 - 2.4.2.2. for simplex drum brake linings:
 - $M_{mean} \pm 20$ per cent of registered value
 - $M_{hot} \geq$ registered value."

Insert new paragraphs 3 to 3.4.2., to read:

- "3. Brake lining assemblies and drum brake linings for vehicles of categories M_3 , N_2 , N_3 , O_3 , and O_4
 - 3.1. Equipment
 - 3.1.1. The machine shall be equipped with a disc brake of the fixed calliper type with a cylinder diameter of 60 mm and a solid (not ventilated) disc having a diameter of 278 ± 2 mm and a thickness of $12 \text{ mm} \pm 0.5 \text{ mm}$. A rectangular piece of the friction material with an area of $44 \text{ cm}^2 \pm 0.5 \text{ cm}^2$ and a thickness of at least 6 mm shall be attached to the backing plate.
 - 3.1.2. The disc rotational speed shall be 660 ± 10 1/min without load and shall not fall below 600 1/min on full load.
 - 3.1.3. The mean contact pressure at the brake lining working surface shall be constant at $75 \text{ N/cm}^2 \pm 10 \text{ N/cm}^2$.
 - 3.1.4. The test cycles and brake applications during the cycles to be adjustable and automatic.
 - 3.1.5. Output torque and working surface temperature shall be recorded.
 - 3.1.6. Provisions shall be made to direct cooling air across the brake at a rate of $600 \pm 60 \text{ m}^3/\text{h}$.
 - 3.2. Test procedure
 - 3.2.1. Sample preparation

The manufacturer's bedding procedure shall ensure a minimum of 80 per cent surface contact area without exceeding a surface temperature of 200°C.

3.2.2. Test schedule

The test procedure comprises a number of consecutive braking cycles each containing a number of X braking intervals of five seconds brake applied.

| No of cycle | Number of brake applications X | Initial brake rotor temperature (°C) | Forced cooling |
|-------------|--------------------------------|--------------------------------------|----------------|
| 1 | 5 | 100 | yes |
| 2 | 5 | increasing ≤ 200 | no |
| 3 | 5 | 200 | no |
| 4 | 5 | increasing ≤ 300 | no |
| 5 | 5 | 300 | no |
| 6 | 3 | 250 | yes |
| 7 | 3 | 200 | yes |
| 8 | 3 | 150 | yes |
| 9 | 10 | 100 | yes |
| 10 | 5 | increasing ≤ 300 | no |
| 11 | 5 | 300 | no |

3.3. Evaluation of test results

Friction behaviour is determined from the brake torque noted in selected cycles of the test schedule. Brake torque shall be translated to coefficient of friction μ .

The μ -value of each brake application shall be determined as the mean value of the 5 seconds brake applied.

3.3.1. The operational coefficient of friction μ_{op1} is the mean value of μ recorded for the brake applications in cycles 1 and μ_{op2} is the mean value of μ recorded for the brake applications in cycle 9.

3.3.2. The maximum coefficient of friction μ_{max} is the highest value of μ recorded in an application during cycles 1 to 11 inclusive.

3.3.3. The minimum coefficient of friction μ_{min} is the lowest value of μ recorded in an application during cycles 1 to 11 inclusive.

3.4. Acceptance criteria

3.4.1. With each application for approval of a replacement brake lining assembly type or a replacement drum brake lining type, there shall be submitted values for μ_{op1} , μ_{op2} , μ_{min} and μ_{max} .

3.4.2. During production of an approved replacement brake lining assembly type or replacement drum brake lining type, test samples must demonstrate compliance with the values registered under paragraph 3.4.1. of this annex within the following tolerances:

μ_{op1} , $\mu_{op2} \pm 15$ per cent of the registered value
 $\mu_{min} \geq$ registered value
 $\mu_{max} \leq$ registered value."
